
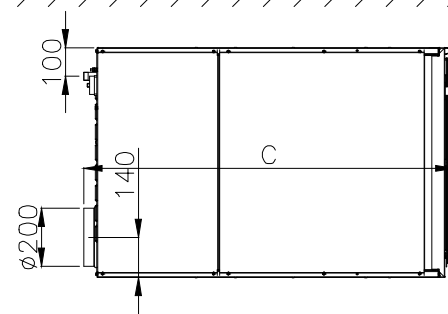


LEGEND

1. Electronic control
2. Control panel lock
3. Emergency stop button
4. Door
5. Steam inlet
6. Condensate outlet
7. Main switch
8. Main power supply
9. Air outlet
10. Suction
11. Exhaust duct
12. Earthing connection
13. Lint screen cover

Type	A [mm]	B [mm]	C [mm]
T 11	762	990	1070
T 13	852	1080	1160
T 16	972	1200	1280

STEAM CONNECTION:

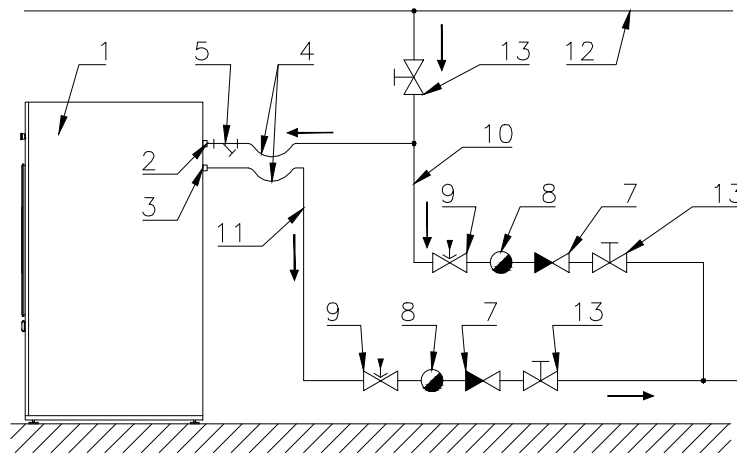

1. Dryer
2. Steam supply inlet (G3/4")
3. Steam outlet (G3/4")
4. Flexible hose for connecting the dryer to supply and return lines
5. Filter (G3/4") (part of delivery)
6. -
7. Check valve
8. Steam trap with built-in strainer
9. Vacuum breaker
10. Condensate return line from steam supply line
11. Steam return line
12. Steam supply line
13. Manual steam shut-off valve

EXHAUST SYSTEM:

The dryer produces hot humid air (maximum temp. 70°C) and combustible lint. To reduce a risk of fire the dryer must be exhausted to the outdoors by means of exhaust duct connected to exhaust piping.

The design of the flue system shall be such that any a condensate formed when operating the appliance from cold shall either be retained and subsequently re-evaporated or discharged.

If possible, do not install dryers and gas fired hot water heaters or the other gravity vented appliances in the same room.

Use exhaust ducts made of sheet metal or other noncombustible material.

The dryer requires an action related to air which replaced the air exhausted from the dryer. Opening(s) for air supply from outside of the building should be as close to the dryer(s) as possible.

Aerating opening(s) for the make-up air supply required per each individual dryer is 0,16 m².

Type	Optimum air flow [m ³ /hod]	Max. static back pressure at pipeline [Pa]
T 11	520 [ⓔ]	220
T 13	550	240
T 16	600	260

	T 11	T 13	T 16
MACHINE DIMENSIONS			
Width – maximum	795 mm	795 mm	795 mm
Depth	1070 mm	1160 mm	1280 mm
Height – maximum	1700 mm	1700 mm	1700 mm
Cylinder – diameter	760 mm	760 mm	760 mm
– depth	540 mm	630 mm	750 mm
– capacity	250 l	285 l	345 l
Net weight	230 kg	250 kg	250 kg
Air outlet	ø200 mm	ø200 mm	ø200 mm
STEAM			
Heating power			
– pressure 0.3 ÷ 0.6 MPa	16.6 ÷ 19.4 kW	25.5 ÷ 29.9 kW	25,5 ÷ 35,6 kW
– pressure 0.7 ÷ 1.0 MPa	20,0 ÷ 22.3 kW	21,5 ÷ 24 kW	24,8 ÷ 27,7 kW
Steam connection	G ³ / ₄ "	G ³ / ₄ "	G ³ / ₄ "
Steam pressure	0.3÷0.6 MPa / 0.7÷1.0 MPa	0.3÷0.6 MPa / 0.7÷1.0 MPa	0.3÷0.6 MPa / 0.7÷1.0 MPa
Condense drain	G ³ / ₄ "	G ³ / ₄ "	G ³ / ₄ "
Average steam consumption			
– pressure 0.6 MPa	25.3 kg/hour	39 kg/hour	46,5 kg/hour
– pressure 1.0 MPa	28.9 kg/hour	31,1 kg/hour	35,9 kg/hour
ELECTRICAL DATA			
Drive with reverse power	0.25 kW	0.25 kW	0.25 kW
Fan power (reversing model)	0.55 kW	0.55 kW	0.55 kW
Non reversing drive power	0.55 kW	0.55 kW	0.55 kW
Voltage system	3+PEN ~50Hz 400/230V / TN-C		
Power supply–reverse/without reverse	0.9/0.7 kW	0.9/0.7 kW	0.9/0.7 kW
Fuse	10 A	10 A	10 A
Conductor section [mm ² Cu]	4x 1.5	4x 1.5	4x 1.5
Execution of internal protection	IP 43	IP 43	IP 43

primus

T11S
T13S
T16S

Date: 11/2005 No. 06-110-2.2

Author: RJ Index/date E/11.2010

TUMBLE DRYER